






### Features:

- High Quality Encapsulated Transformer
- Single/Dual - Primary/Secondary windings
- Power: 20/22/25VA 50/60Hz
- Temperature Class: - Class B (130°C)
- Ambient temperature: +40°C
- Dielectric Strength: 4.2KVrms
- Manufactured and tested in accordance to UL506, EN61558, EN60950, CE

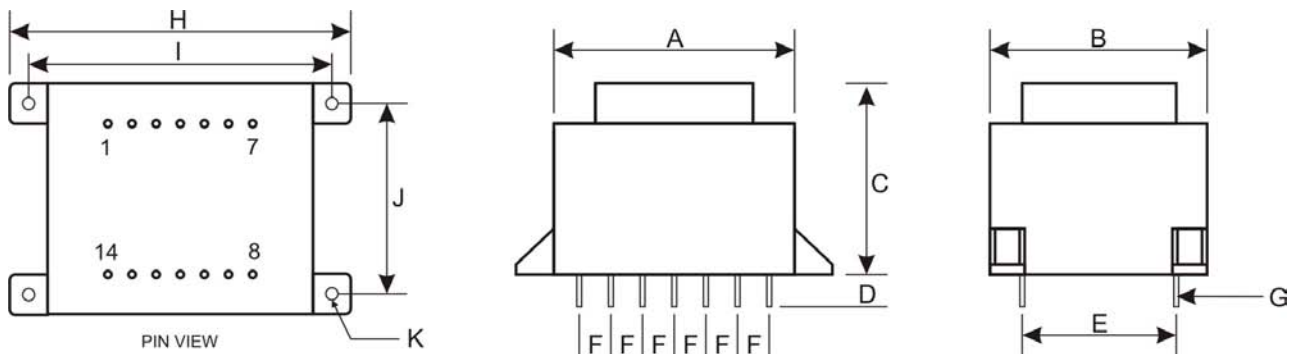

Unused Pins will be omitted from standard parts.

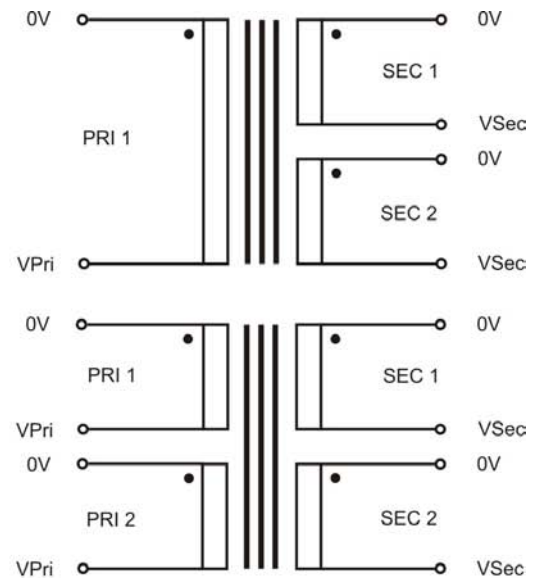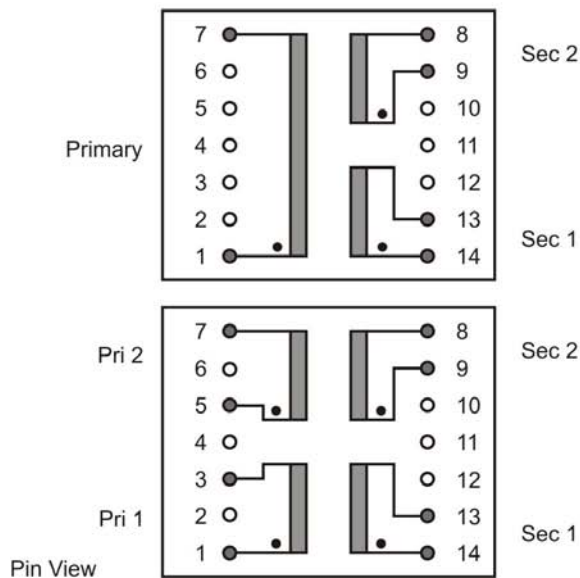

VA Rating	Dimension (mm)											Weight (g)
	A	B	C	D	E	F	G	H	I	J	K	
<b>20 / 22 / 25</b>	63.5	54.5	45.5	4	32.5	5	0.8Φ	82.5	72.5	43.5	4.2Φ	600
<b>Tolerance</b>	+/-1.0	+/-1.0	+/-1.0	+/-1.0	+/-0.5	+/-0.2	+/-0.1	+/-0.1	+/-0.5	+/-0.5	+/-0.2	approx

Products can be altered to suite custom requirements. Please contact Vigortronix for your specific requirements.



VA Rating	Part No	Input Voltage (Vac)	Output Voltage (Vac)	Output Current (mA)	ta (°C)
20	VTX-121-6020-206	230	2 x 6	1666	40
20	VTX-121-6020-209	230	2 x 9	1111	40
20	VTX-121-6020-212	230	2 x 12	833	40
20	VTX-121-6020-215	230	2 x 15	666	40
20	VTX-121-6020-218	230	2 x 18	555	40
20	VTX-121-6020-224	230	2 x 24	416	40
20	VTX-121-6020-406	2 x 115	2 x 6	1666	40
20	VTX-121-6020-409	2 x 115	2 x 9	1111	40
20	VTX-121-6020-412	2 x 115	2 x 12	833	40
20	VTX-121-6020-415	2 x 115	2 x 15	666	40
20	VTX-121-6020-418	2 x 115	2 x 18	555	40
20	VTX-121-6020-424	2 x 115	2 x 24	416	40
22	VTX-121-6022-206	230	2 x 6	1833	40
22	VTX-121-6022-209	230	2 x 9	1222	40
22	VTX-121-6022-212	230	2 x 12	916	40
22	VTX-121-6022-215	230	2 x 15	733	40
22	VTX-121-6022-218	230	2 x 18	611	40
22	VTX-121-6022-224	230	2 x 24	458	40
22	VTX-121-6022-406	2 x 115	2 x 6	1833	40
22	VTX-121-6022-409	2 x 115	2 x 9	1222	40
22	VTX-121-6022-412	2 x 115	2 x 12	916	40
22	VTX-121-6022-415	2 x 115	2 x 15	733	40
22	VTX-121-6022-418	2 x 115	2 x 18	611	40
22	VTX-121-6022-424	2 x 115	2 x 24	458	40
25	VTX-121-6025-206	230	2 x 6	2083	40
25	VTX-121-6025-209	230	2 x 9	1388	40
25	VTX-121-6025-212	230	2 x 12	1041	40
25	VTX-121-6025-215	230	2 x 15	833	40
25	VTX-121-6025-218	230	2 x 18	694	40
25	VTX-121-6025-224	230	2 x 24	520	40
25	VTX-121-6025-406	2 x 115	2 x 6	2083	40
25	VTX-121-6025-409	2 x 115	2 x 9	1388	40
25	VTX-121-6025-412	2 x 115	2 x 12	1041	40
25	VTX-121-6025-415	2 x 115	2 x 15	833	40
25	VTX-121-6025-418	2 x 115	2 x 18	694	40
25	VTX-121-6025-424	2 x 115	2 x 24	520	40