







Features:

- High Quality Encapsulated Transformer
- Single/Dual Primary windings
- Power: 6.0VA 50/60Hz
- Temperature Class: - Class B (130°C)
- Ambient temperature: +70°C
- Dielectric Strength: 4200Vrms
- Materials: UL94-V0
- Manufactured and tested in accordance to EN61558, EN60950, CE



Unused Pins will be omitted from standard parts.
Recommended Drill Hole Diameter for Pins: 1.0mm

Pin View

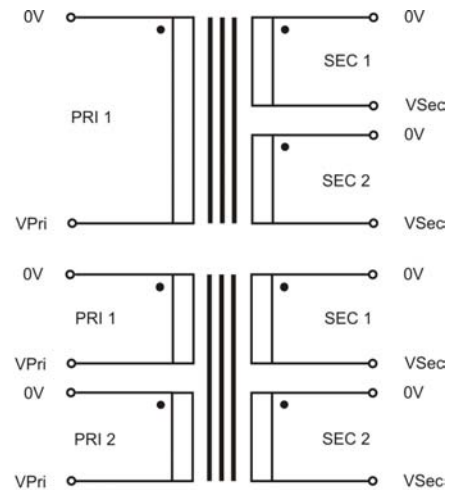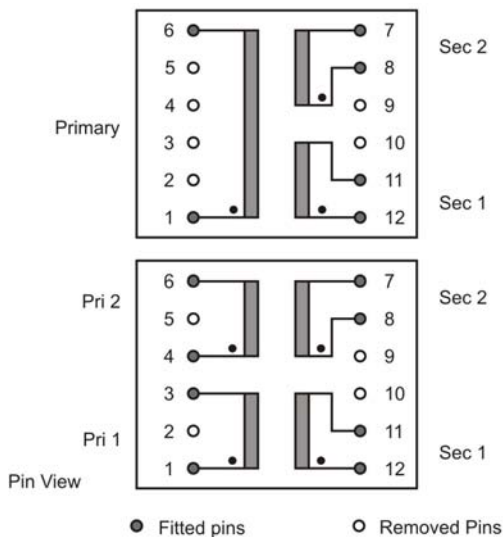

Windings can be connected in Parallel or Series

VA Rating	Dimension (mm)							Weight (g)
	A	B	C	D	E	F	G	
6	44	37	32	4	25	5	Sq 0.8	190
Tolerance	+/-0.5	+/-0.5	+/-0.5	+/-1.0	+/-0.5	+/-0.2	+/-0.1	approx

Please contact Vigortronix for any enquires. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

VA Rating	Part No	Input Voltage (Vac)	Output Voltage (Vac)	Output Current (mA)	ta (°C)	Approvals
6.0	VTX-121-4206-206	230	2 x 6	500	70	CE
6.0	VTX-121-4206-209	230	2 x 9	333	70	
6.0	VTX-121-4206-212	230	2 x 12	250	70	
6.0	VTX-121-4206-215	230	2 x 15	200	70	
6.0	VTX-121-4206-218	230	2 x 18	166	70	
6.0	VTX-121-4206-224	230	2 x 24	125	70	

VA Rating	Part No	Input Voltage (Vac)	Output Voltage (Vac)	Output Current (mA)	ta (°C)	Approvals
6.0	VTX-121-4206-406	2 x 115	2 x 6	500	70	CE
6.0	VTX-121-4206-409	2 x 115	2 x 9	333	70	
6.0	VTX-121-4206-412	2 x 115	2 x 12	250	70	
6.0	VTX-121-4206-415	2 x 115	2 x 15	200	70	
6.0	VTX-121-4206-418	2 x 115	2 x 18	166	70	
6.0	VTX-121-4206-424	2 x 115	2 x 24	125	70	