



Features:


- 12W Single Output
- Low standby power <0.3w
- Input: 90 ~ 264Vac , 47~63Hz (120~370VDC)
- Output range: 9V~24VDC
- Low Ripple & Noise.
- Meets EPS 2.0 LEVEL V
- Dielectric Strength: 3600Vrms
- Interchangeable Pin Headers
- Safety: UL, CUL, EN60950, CE

Part No	Power Rating Watts	Output Voltage (Vdc)	Output Current (mA)
VTX-212-012-509	12	9	1333
VTX-212-012-512	12	12	1000
VTX-212-012-515	12	15	800
VTX-212-012-518	12	18	666
VTX-212-012-520	12	20	600
VTX-212-012-524	12	24	500

Model: 16Watt		Specification
INPUT Pin 1: L Pin 2: N	Voltage Range	90 ~ 264VAC / 47 ~ 63Hz (120VDC ~ 370VDC)
	Current	250mA Max (100VAC) / 150mA Max (240VAC)
	Inrush Current	40A Max (100VAC) / 60A Max (240VAC)
	Leakage Current	<0.25 mA Max
OUTPUT Pin 3: DC+ Pin 4: DC-	Voltage Accuracy	3% +/-
	Ripple	<240mV Max (Vp~p)
	Noise	<1% Vout Max (Vp~p)
	Efficiency	79% Typically
	Protection	Over Power, Over Voltage & Short Circuit Protection
Insulation	Input to Output	3600Vrms, 5mA 1 Min (4200VAC 2sec)
Environment	Operating Temperature	-25°C ~ +70°C (Full Load)
	Storage Temperature	-40°C ~ +105°C
	Weight	70g
Safety	Agency Approval	UL EN60950-1, EN60950-1, CSA C22.2 No.60950-1
EMC	EMI	FCC CFR 47 PART 15, EN55022, EN61000-3
	EMS	EN55024, EN61000-4

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Case Dimensions:

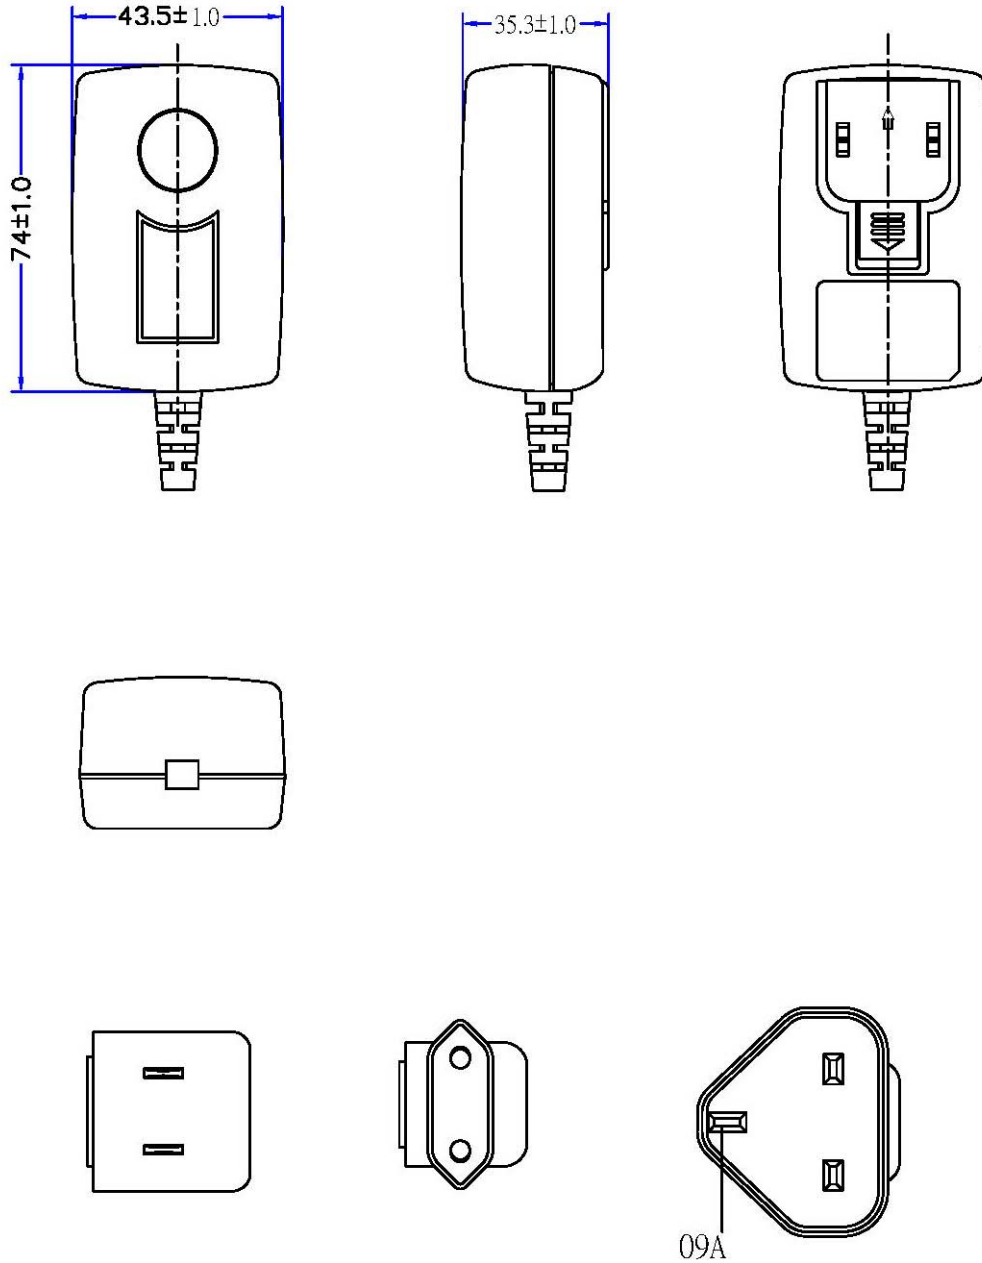

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
 The information contained in this document is subject to change without notice.