



Features:



- Power rating: 2 ~ 30VA
- Ambient temperature: 40°C
- Temperature class: Class B (130°C)
- Dielectric strength: 4200Vrms
- 100% electrical and flash tested.
- Manufactured and tested in accordance to EN61558 and EN60950




Type UI30




Type UI39

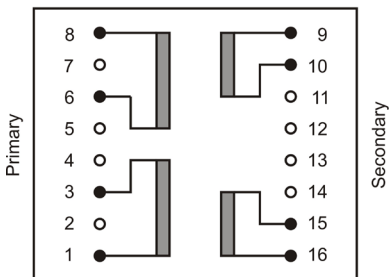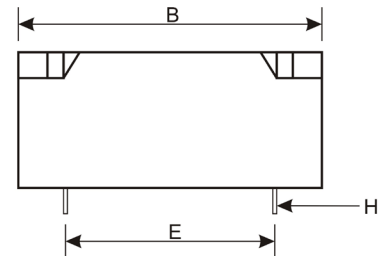

Type UI30 Pin View

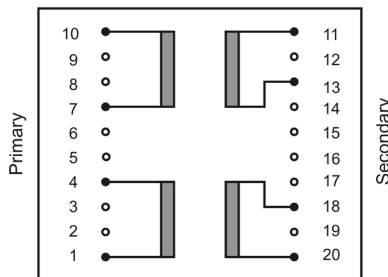

Type UI39 Pin View

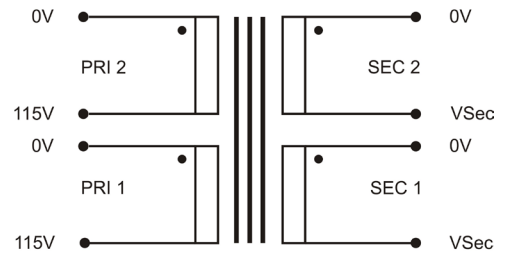

Unused pins are omitted for standard parts

VA Rating	Dimension (mm)								Type
	A	B	C	D	E	F	G	H	
2	43.5	52.5	17.0	4.0	35.0	5.0		Sq 0.64	UI30
4	43.5	52.5	19.0	4.0	35.0	5.0		Sq 0.64	
6	43.5	52.5	22.0	4.0	35.0	5.0		Sq 0.64	
8	43.5	52.5	28.0	4.0	35.0	5.0		Sq 0.64	
9	43.5	52.5	28.0	4.0	35.0	5.0		Sq 0.64	
10	57.0	68.0	22.0	4.0	45.0	5.0	6.0	Sq 0.64	UI39
14	57.0	68.0	24.0	4.0	45.0	5.0	6.0	Sq 0.64	
18	57.0	68.0	27.0	4.0	45.0	5.0	6.0	Sq 0.64	
24	57.0	68.0	31.0	4.0	45.0	5.0	6.0	Sq 0.64	
30	57.0	68.0	35.0	4.0	45.0	5.0	6.0	Sq 0.64	
Tolerance	+/-1.0	+/-1.0	+/-1.0	+/-1.0	+/-0.5	+/-0.2	+/-0.2	+/-0.1	

Please contact Vigortronix for any enquires. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.



VA Rating	Part No	Input Voltage (Vac)	Output Voltage (Vac)	Output Current (mA)	Weight (g)	Type
2	VTX-127-3002-406	2 x 115	2 x 6	166	115	Type: UI30
2	VTX-127-3002-409	2 x 115	2 x 9	111	115	
2	VTX-127-3002-412	2 x 115	2 x 12	83	115	
2	VTX-127-3002-415	2 x 115	2 x 15	66	115	
2	VTX-127-3002-418	2 x 115	2 x 18	55	115	
2	VTX-127-3002-424	2 x 115	2 x 24	41	115	
4	VTX-127-3004-406	2 x 115	2 x 6	333	135	
4	VTX-127-3004-409	2 x 115	2 x 9	222	135	
4	VTX-127-3004-412	2 x 115	2 x 12	166	135	
4	VTX-127-3004-415	2 x 115	2 x 15	133	135	
4	VTX-127-3004-418	2 x 115	2 x 18	111	135	
4	VTX-127-3004-424	2 x 115	2 x 24	83	135	
6	VTX-127-3006-406	2 x 115	2 x 6	500	175	
6	VTX-127-3006-409	2 x 115	2 x 9	333	175	
6	VTX-127-3006-412	2 x 115	2 x 12	250	175	
6	VTX-127-3006-415	2 x 115	2 x 15	200	175	
6	VTX-127-3006-418	2 x 115	2 X 18	166	175	
6	VTX-127-3006-424	2 x 115	2 X 24	125	175	
8	VTX-127-3008-406	2 x 115	2 x 6	666	230	
8	VTX-127-3008-409	2 x 115	2 x 9	444	230	
8	VTX-127-3008-412	2 x 115	2 x 12	333	230	
8	VTX-127-3008-415	2 x 115	2 x 15	266	230	
8	VTX-127-3008-418	2 x 115	2 x 18	222	230	
8	VTX-127-3008-424	2 x 115	2 x 24	166	230	
9	VTX-127-3009-406	2 x 115	2 x 6	750	230	
9	VTX-127-3009-409	2 x 115	2 x 9	500	230	
9	VTX-127-3009-412	2 x 115	2 x 12	375	230	
9	VTX-127-3009-415	2 x 115	2 x 15	300	230	
9	VTX-127-3009-418	2 x 115	2 x 18	250	230	
9	VTX-127-3009-424	2 x 115	2 x 24	187	230	



VA Rating	Part No	Input Voltage (Vac)	Output Voltage (Vac)	Output Current (mA)	Weight (g)	
10	VTX-127-3910-406	2 x 115	2 x 6	833	260	Type: UI39
10	VTX-127-3910-409	2 x 115	2 x 9	555	260	
10	VTX-127-3910-412	2 x 115	2 x 12	416	260	
10	VTX-127-3910-415	2 x 115	2 x 15	333	260	
10	VTX-127-3910-418	2 x 115	2 x 18	277	260	
10	VTX-127-3910-424	2 x 115	2 x 24	208	260	
14	VTX-127-3914-406	2 x 115	2 x 6	1167	310	
14	VTX-127-3914-409	2 x 115	2 x 9	777	310	
14	VTX-127-3914-412	2 x 115	2 x 12	583	310	
14	VTX-127-3914-415	2 x 115	2 x 15	466	310	
14	VTX-127-3914-418	2 x 115	2 X 18	388	310	
14	VTX-127-3914-424	2 x 115	2 X 24	291	310	
18	VTX-127-3918-406	2 x 115	2 x 6	1500	350	
18	VTX-127-3918-409	2 x 115	2 x 9	1000	350	
18	VTX-127-3918-412	2 x 115	2 x 12	750	350	
18	VTX-127-3918-415	2 x 115	2 x 15	600	350	
18	VTX-127-3918-418	2 x 115	2 x 18	500	350	
18	VTX-127-3918-424	2 x 115	2 x 24	375	350	
24	VTX-127-3924-406	2 x 115	2 x 6	2000	435	
24	VTX-127-3924-409	2 x 115	2 x 9	1333	435	
24	VTX-127-3924-412	2 x 115	2 x 12	1000	435	
24	VTX-127-3924-415	2 x 115	2 x 15	800	435	
24	VTX-127-3924-418	2 x 115	2 x 18	666	435	
24	VTX-127-3924-424	2 x 115	2 x 24	500	435	
30	VTX-127-3930-406	2 x 115	2 x 6	2500	515	
30	VTX-127-3930-409	2 x 115	2 x 9	1666	515	
30	VTX-127-3930-412	2 x 115	2 x 12	1250	515	
30	VTX-127-3930-415	2 x 115	2 x 15	1000	515	
30	VTX-127-3930-418	2 x 115	2 x 18	833	515	
30	VTX-127-3930-424	2 x 115	2 x 24	625	515	