

Features:

- Wide Operating Voltage 90 to 264 VAC, 47 to 63 Hz
- Internal EMI filter
- Input Surge Current, Over Voltage and Over Load protection
- Single Output
- Class I
- Over Voltage Protection (Crowbar Design)
- 2 year warranty


Electrical Characteristics:

Vin	Safety Approvals Input Voltage Range		100~240VAC
	Operate Voltage Range		90~264VAC
f _{in}	Input Frequency		47~63Hz
P _o	Output Power Range		See rating chart
V _o	Output Voltage Range		See rating chart
I _o	Output Current Range		See rating chart
I _{il}	Input Current (Low Line)	I _o =Full load, V _{in} =100VAC	1.6A
I _{ih}	Input Current (High Line)	I _o =Full load, V _{in} =240VAC	1.6A
I _r	Low Line Inrush Current	I _o =Full load, 25°C, Cool start, V _{in} =115VAC	30A (max.)
	High Line Inrush Current	I _o =Full load, 25°C, Cool start, V _{in} =230VAC	60A (max.)
Eff	Efficiency	I _o =Full Load, V _{in} =230VAC	77~90%
REG-i	Line Regulation	I _o =Full Load	0.5~1%
REG-o	Load Regulation	V _{in} =230VAC	2~5%
OVP	Over Voltage Protection	Over Voltage Protection	112~132%
OCP	Over Current Protection	Over Current Protection	110~150%
T _{tr}	Time of Transient Response	I _o =Full Load to Half Load, V _{in} =100VAC	4mS (max.)
T _h	Hold-Up Time	I _o =Full Load, V _{in} =110VAC	12mS (min.)
T _s	Start Up Time	I _o =Full Load, V _{in} =100VAC	2S (max.)
V _{p-p}	Ripple & Noise(Peak to Peak)	Full Load, V _{in} =90VAC	1% (max.)
I _{lk}	Safety Ground Leakage Current	V _{in} =240VAC/60Hz	0.75mA (max.)
TC	Temperature Coefficient	All output	±0.04%/°C
P _{no}	No-Load Power Consumption	No load, V _{in} =230VAC	See rating chart
V _{ps}	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242VDC (min.)
V _{pg}	Dielectric Withstanding Voltage for Primary to PE	Primary to PE	2718VDC (min.)
R _{is}	Isolation Resistance	Test Voltage=500VDC	50MΩ (min.)

Application:

- Monitor
- Industrial PC
- Set-top box
- AV equipment
- CCD recorder

Safety Approvals:


UL/c-UL(UL 60950-1:2nd Edition)
TUV/GS(EN 60950-1:2nd Edition)

Environmental

T _o	Operating Temperature	See derating curve
T _s	Storage Temperature	-40~85°C
H _o	Operating Humidity	0~95%
H _r	Storage Humidity	0~95%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	0.1M Hrs (min.)
P _d	Derate linearly from 100% load at 50°C to 50% load at 70°C	


Output Voltage And Current Rating Chart (Single Output) :

Model Number	Output Voltage	Output Current	Total Regulation	Max. Output Power	Pno (max.)
VTX-210-060-005	5 ~ 6 VDC	8.00 ~ 6.66 A	5%	40W	0.5W
VTX-210-060-007	6 ~ 8 VDC	8.00 ~ 6.00 A	5%	48W	0.5W
VTX-210-060-009	8 ~ 11 VDC	6.87 ~ 5.00 A	5%	55W	0.5W
VTX-210-060-012	11 ~ 13 VDC	5.45 ~ 4.61 A	5%	60W	0.5W
VTX-210-060-015	13 ~ 16 VDC	4.61 ~ 3.75 A	5%	60W	0.5W
VTX-210-060-018	16 ~ 21 VDC	3.75 ~ 2.85 A	5%	60W	0.5W
VTX-210-060-024	21 ~ 27 VDC	2.85 ~ 2.22 A	3%	60W	0.5W
VTX-210-060-030	27 ~ 33 VDC	2.22 ~ 1.81 A	3%	60W	0.5W
VTX-210-060-036	33 ~ 40 VDC	1.81 ~ 1.50 A	3%	60W	0.5W
VTX-210-060-048	40 ~ 48 VDC	1.50 ~ 1.25 A	2%	60W	0.5W

PIN CHART

PIN MODEL	1	2	3	4	5	6
SBU58-1XX	OUT	OUT	OUT	RTN	RTN	RTN


Mechanical Specifications:

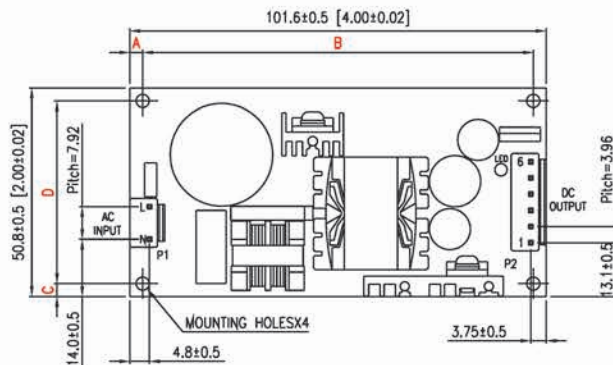


MOUNTING HOLES	3.2±0.5
A	3.15±0.5
B	95.3±0.5
C	3.15±0.5
D	44.5±0.5

Note:

1. Dimensions are shown in mm.
2. Weight: 140gs approx.
3. Input connector mates with JST housing VHR-3N and JST SVH series crimp terminal.
4. Output connector mates with JST housing VHR-6N and JST SVH series crimp terminal.

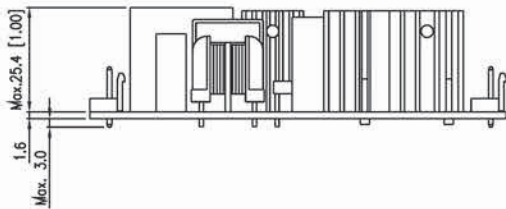

Derating Curve :

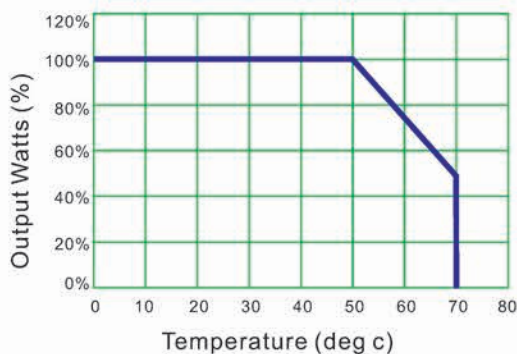

1. Operating Temperature: 0 to 70°C
2. Derate linearly from 100% load at 50°C to 50% load at 70°C