



### Features:

- 75W Compact Size 99.0 x 97.0 x 30.0mm
- Wide AC & DC Input 85V to 305VAC
- Temperature Range -30°C to +70°C
- Over-voltage Category OVC III
- Output Range: 3.3V - 48VDC
- Low Standby Power <0.5W
- Fully Isolated Pri - Sec >4000Vrms
- Insulation: Class II
- Materials: UL94-V0
- UL/EN62368-1, EN61558, EN60335
- 3 Year Warranty



### Description

VTX-212-075-0### AC-DC enclosed caged PSU. It features a wide AC input 85V to 305VAC and a DC input voltage 100 to 430VDC. The converters have been designed with low power consumption, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets IEC/EN/UL62368/EN60335/EN61558 standards. The converters are widely used in industrial, power, home appliances, instrumentation, communication, LED lighting and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in this Datasheet or contact our Technical team for further support.

### Selection Guide

| Part Number     | Power Rating Watts | Output Voltage (VDC) | Output Voltage Adj. Range | Output Current (mA) | Ambient Temp. (°C)   | Efficiency Typical | Input Range                   |
|-----------------|--------------------|----------------------|---------------------------|---------------------|----------------------|--------------------|-------------------------------|
| VTX-212-075-005 | 70                 | 5                    | 2.8~3.6                   | 14000               | 50°C<br>(70°C @ 60%) | >85%               | 85 - 305VAC<br>(100 - 430VDC) |
| VTX-212-075-012 | 72                 | 12                   | 10.2~13.8                 | 6000                |                      |                    |                               |
| VTX-212-075-015 | 75                 | 15                   | 13.5~18                   | 5000                |                      |                    |                               |
| VTX-212-075-024 | 75                 | 24                   | 21.6~28.8                 | 3200                |                      |                    |                               |
| VTX-212-075-036 | 75                 | 36                   | 32.4~39.6                 | 2100                |                      |                    |                               |
| VTX-212-075-048 | 75                 | 48                   | 43.2~52.8                 | 1600                |                      |                    |                               |
| VTX-212-075-055 | 75                 | 55                   | 52~56                     | 1360                |                      |                    |                               |

**Note: Other output voltages are available upon request.**

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.  
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK  
Tel. +44 (0)1993 777570 Web. [www.vigortronix.com](http://www.vigortronix.com), E-mail: [sales@vigortronix.com](mailto:sales@vigortronix.com)  
Vigortronix is a trading name of Vigortronix Limited

[Vigortronix.com](http://Vigortronix.com)

| Input Specification |               |                |         |     |      |
|---------------------|---------------|----------------|---------|-----|------|
| Item                | Conditions    | Min            | Typical | Max | Unit |
| Input Voltage       | AC Input      | 85             | -       | 305 | VAC  |
|                     | DC Input      | 100            | -       | 430 | VDC  |
| Input Frequency     |               | 47             | -       | 63  | Hz   |
| Input Current       | 115VAC        | -              | -       | 2   | A    |
|                     | 230VAC        | -              | -       | 1   |      |
| Inrush Current      | 115VAC        | -              | 40      | -   |      |
|                     | 230VAC        | -              | 65      | -   |      |
| Leakage Current     | 277VAC / 50Hz | 0.75mA RMS Max |         |     |      |

| Output Specification     |                                      |                                   |         |     |      |
|--------------------------|--------------------------------------|-----------------------------------|---------|-----|------|
| Item                     | Conditions                           | Min                               | Typical | Max | Unit |
| Output Voltage           | Output 5V                            | -                                 | +/-2    | -   | %    |
|                          | 12V/15/24/48V/55V                    | -                                 | +/-1    | -   |      |
| Line Regulation          | Full Load 5V                         | -                                 | +/-0.5  | -   |      |
|                          | 12V/15/24/48V/55V                    | -                                 | +/-0.5  | -   |      |
| Load Regulation          | 0% - 100% Load 5V                    | -                                 | +/-1    | -   |      |
|                          | 12V/15/24/48V/55V                    | -                                 | +/-0.5  | -   |      |
| Ripple / Noise           | 20MHz Bandwidth (Peak to Peak Value) | -                                 | 120     | 220 | mV   |
| Stand by Power           | 230VAC                               | -                                 | 0.2     | 0.5 | W    |
| Temp. Coefficient        |                                      | -                                 | +/-0.03 | -   | %/°C |
| Short Circuit Protection |                                      | Hiccup, Continuous, Self-recovery |         |     |      |
| Over Current Protection  |                                      | >110% Load, Self-recovery         |         |     |      |
| Over Voltage Protection  |                                      | Hiccup, Continuous, Self-recovery |         |     |      |
| Minimum Load             |                                      | 0                                 | -       | -   | %    |
| Hold-up Time             | 115VAC Input                         | -                                 | 8       | -   | mS   |
|                          | 230VAC Input                         | -                                 | 55      | -   |      |

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.  
 The information contained in this document is subject to change without notice.


| General Specification        |                              |                                     |         |      |       |
|------------------------------|------------------------------|-------------------------------------|---------|------|-------|
| Item                         | Conditions                   | Min                                 | Typical | Max  | Unit  |
| <b>Dielectric Strength</b>   | Input to Output (1Min, 10mA) | 4000                                | -       | -    | VAC   |
|                              | Input to Earth (1Min, 10mA)  | 2000                                | -       | -    |       |
| <b>Insulation Resistance</b> | Input to Output (500VDC)     | 100                                 |         |      | M.Ohm |
| <b>Operating Temperature</b> |                              | -30                                 | -       | +70  | °C    |
| <b>Storage Temperature</b>   |                              | -40                                 | -       | +85  |       |
| <b>Operating Humidity</b>    |                              | 20                                  | -       | 90   | %RH   |
| <b>Storage Humidity</b>      |                              | -                                   | -       | 95   |       |
| <b>Switching Frequency</b>   |                              | -                                   | 65      | -    | KHz   |
| <b>Altitude</b>              |                              | -                                   | -       | 5000 | m     |
| <b>Safety Class</b>          |                              | CLASS I                             |         |      |       |
| <b>MTBF</b>                  |                              | >300KHrs @ 25°C (MIL-HDBK-217F)     |         |      |       |
| <b>Safety Approvals</b>      |                              | IEC/UL62368-1, EN61558-1, EN60335-1 |         |      |       |
| <b>Case Material</b>         |                              | Metal (AL5052)                      |         |      |       |
| <b>Dimensions</b>            |                              | 99.00 x 97.00 x 30.00mm             |         |      |       |
| <b>Cooling Method</b>        |                              | Free air convection                 |         |      |       |
| <b>Weight</b>                |                              | 220g                                |         |      |       |

| EMC Specification |                   |  |
|-------------------|-------------------|--|
| <b>Emissions</b>  | CE /RE            | CISPR32 / EN55032 CLASS B<br>EN55014-1       |
| <b>Immunity</b>   | ESD               | IEC/EN 61000-4-2 CONTACT +/-6KV<br>EN55014-2 |
|                   | RS                | IEC/EN 61000-4-3 10V/m<br>EN55014-2          |
|                   | EFT               | IEC/EN 61000-4-4 +/-2.2KV                    |
|                   | SURGE             | IEC/EN 61000-4-5, EN55014-2                  |
|                   | CS                | IEC/EN 61000-4-6 10V/r.m.s.<br>EN55014-2     |
|                   | Voltage Variation | IEC/EN 61000-4-11, EN55014-2                 |


Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.  
The information contained in this document is subject to change without notice.

## Derating Graphs

Temperature Derating Graph

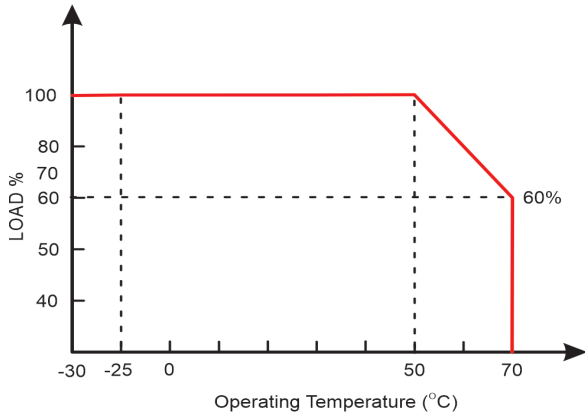

Input Voltage Derating Graph

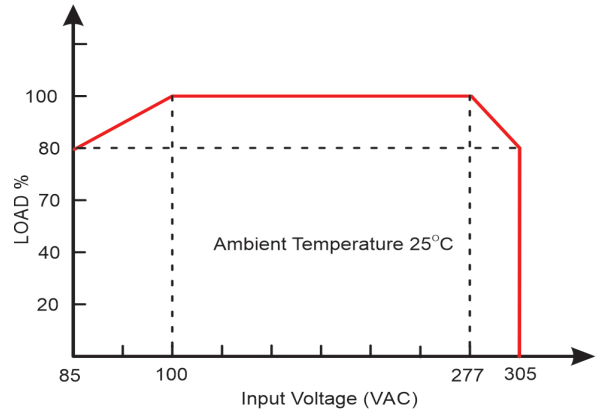

| Efficiency Guide |                      |                        |                      |
|------------------|----------------------|------------------------|----------------------|
| Part Number      | Output Voltage (VDC) | Efficiency Typical (%) | Capacitance Load Max |
| VTX-212-075-005  | 5                    | 85                     | 10000 uF             |
| VTX-212-075-012  | 12                   | 87                     | 6000 uF              |
| VTX-212-075-015  | 15                   | 87                     | 5000 uF              |
| VTX-212-075-024  | 24                   | 89                     | 1500 uF              |
| VTX-212-075-036  | 36                   | 89                     | 1000 uF              |
| VTX-212-075-048  | 48                   | 90                     | 680 uF               |
| VTX-212-075-055  | 55                   | 90                     | 680 uF               |

**Note: Other output voltages are available upon request.**

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements. The information contained in this document is subject to change without notice.

