




Features:

- 10W Small Compact SIP style AC-DC converter
- Wide AC & DC Input 85V to 528VAC, 100-745VDC
- Used across 2-Phase supply
- Temperature Range -40°C to +85°C
- Output Range: 3.3V - 24VDC
- Low Standby Power 0.1W
- Fully Isolated Pri - Sec >4000Vrms
- Safety: Class II
- Materials: UL94-V0
- IEC/EN61558, IEC/EN60335
- 1 Year Warranty

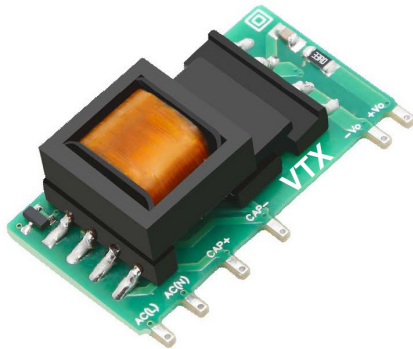

Description

VTX-215-010-1## is a compact SIP style AC-DC power converter. It They feature wide input range accepting either AC or DC voltage, high efficiency, low power consumption and CLASS II reinforced insulation. All models are particularly suitable for industrial control, electric power, instrumentation and smart home applications which don't have high requirement for dimension. A variety of EMC external circuits meet the needs of multiple industries we recommend using the application circuit show in this Datasheet or contact our Technical team for further support.

Selection Guide

Part Number	Power Rating Watts	Output Voltage (VDC)	Output Cur- rent (mA)	Capacitive Load (uF)	Ambient Temp. (°C)	Efficiency Typical	Input Range
VTX-215-010-103	6.6	3.3	2000	1500	85°C	>74%	85 - 528VAC (100 - 745VDC)
VTX-215-010-105	10	5	2000	1500			
VTX-215-010-109	10	9	1100	1000			
VTX-215-010-112	10	12	840	680			
VTX-215-010-115	10	15	670	470			
VTX-215-010-124	10	24	420	330			
Note: Other output voltages are available upon request.							

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited

Vigortronix.com

Input Specification					
Item	Conditions	Min	Typical	Max	Unit
Input Voltage	AC Input	85	-	528	VAC
	DC Input	100	-	745	VDC
Input Frequency		47	-	63	Hz
Input Current	110VAC	-	-	0.30	A
	230VAC	-	-	0.15	
	380VAC	-	-	0.10	
Leakage Current	480VAC / 50Hz	0.50mA RMS Max.			
External Input Fuse		2 Amp Slow Blow Fuse			

Output Specification					
Item	Conditions	Min	Typical	Max	Unit
Output Voltage	10% - 100% Load	-	+/-5	+/-3	%
Line Regulation	Full Load	-	+/-2	-	
Load Regulation	10% - 100% Load	-	+/-3	-	
Ripple / Noise	20MHz Bandwidth (Peak to Peak Value)	-	100	180	mV
Stand by Power	230VAC	-	0.10	0.3	W
Temp. Coefficient		-	+/-0.15	-	%/°C
Short Circuit Protection		Continuous, Self-recovery			
Over Current Protection		>110 Load, Self-recovery			
Minimum Load		10	-	-	%
Hold-up Time	115VAC Input	-	8	-	ms
	230VAC Input	-	35	-	

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited

Vigortronix.com


General Specification						
Item	Conditions		Min	Typical	Max	Unit
Dielectric Strength	Input to Output (1Min, 5mA)		4000	-	-	VAC
Insulation Resistance	Input to Output (500VDC)		50	-	-	MOhm
Power Derating	+55°C - +85°C	3.3V/5V/9V/24V	1.67	-	-	%°C
	+55°C - +85°C	12V/15V	1.72	-	-	
	85VAC - 100VAC		1.33	-	-	%VAC
	277VAC - 305VAC		0.72	-	-	
Operating Temperture			-40	-	+85	°C
Storage Temperture			-40	-	+105	
Storage Humidity			-	-	+95	%RH
Safety Class			CLASS II			
MTBF	25°C (MIL-HDBK-217F)		>500KHrs			
Soldering Profile	Wave-soldering		260 ± 5°C; time: 5 - 10s			
	Manual-welding		360 ± 8°C; time: 3 - 5s			
Safety Approvals			IEC/EN/UL62368-1IEC/EN61558-1, IEC/EN60335-1			
Cooling Method			Free air convection			
Dimensions			38.00 x 20.00 x 15.25mm			
Weight			10.1g (Typ.)			

EMC Specification		
Emissions	CE /RE	CISPR32 / EN55032 CLASS A/B
Immunity	ESD	IEC/EN 61000-4-3 Contact ±6KV/Air ±8KV
	RS	IEC/EN 61000-4-3 10V/m
	EFT	IEC/EN 61000-4-5
	SURGE	IEC/EN 61000-4-6 10V/r.m.s.
	CS	IEC/EN 61000-4-2


Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Derating Graphs

Temperature Derating Graph


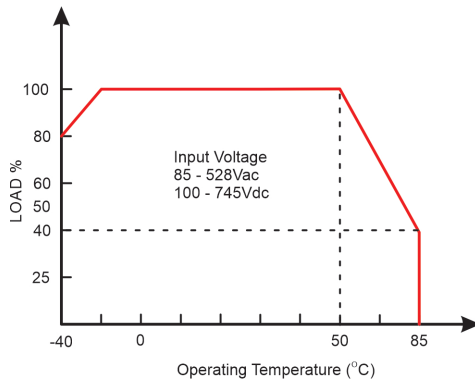


Input Voltage Derating Graph

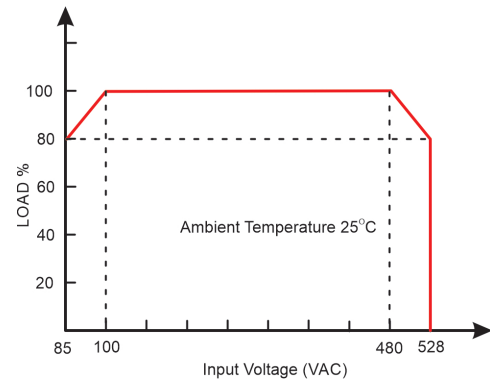

Application Schematic for EMC

Typical Application

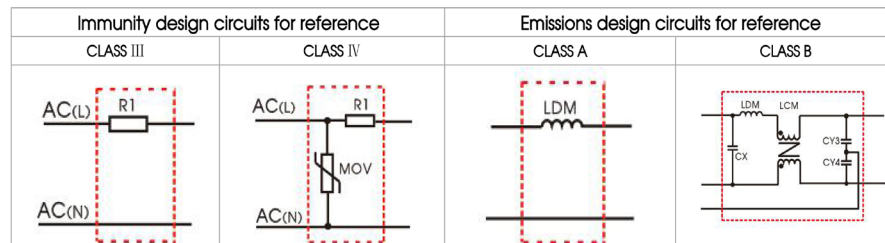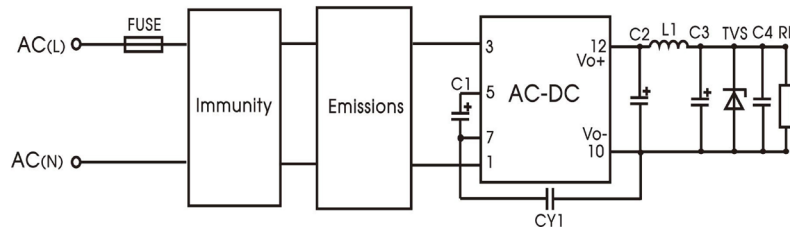

Part Number	C1	C2 (Solid State)	L1	C3	C4	CY1	TVS	Fuse	MOV
VTX-215-010-103	22uF/ 450V	1500uF/6V	2.2uH 6.5A Max 15m Ω	330uF/ 25V	0.1uF/ 50V	1.0nF/ 400VAC	TVS Transistor to protect the downstream circuit in case of abnormalities. Recommend 1.2 times the output voltage.	1Amp/ 300V Slow Blow	14D561
VTX-215-010-105		820uF/16V							
VTX-215-010-109		470uF/25V	2.2uH 6.5A Max 15m Ω	1000uF/ 25V					
VTX-215-010-112									
VTX-215-010-115			3.3uH 5A Max 25m Ω	100uF/ 35V					
VTX-215-010-124									

Note: For additional filtering requirements, contact technical support

- C1 is used as filter capacitor with AC input (must be connected externally) and as EMC filter capacitor with DC input (must be connected), and it is recommended to use the capacitor with ripple current >400mA@100KHz.
- We recommend using an electrolytic capacitor with high frequency and low ESR (ESR of C3 at low temperature of -40°C ≤ 1.1Ω) rating for C3 (refer to manufacture's datasheet), electrolytic capacitor can be used for C2 when applied in normal and high temperature environments. Combined with C2, L1, they form a pi-type filter circuit. Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C4 is a ceramic capacitor, used for filtering high frequency noise.
- A suppressor diode (TVS) is recommended to protect the application in case of converter failure and specification should be 1.2 times of the output voltage.

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.


The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK

Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com

Vigortronix is a trading name of Vigortronix Limited

Dimensions

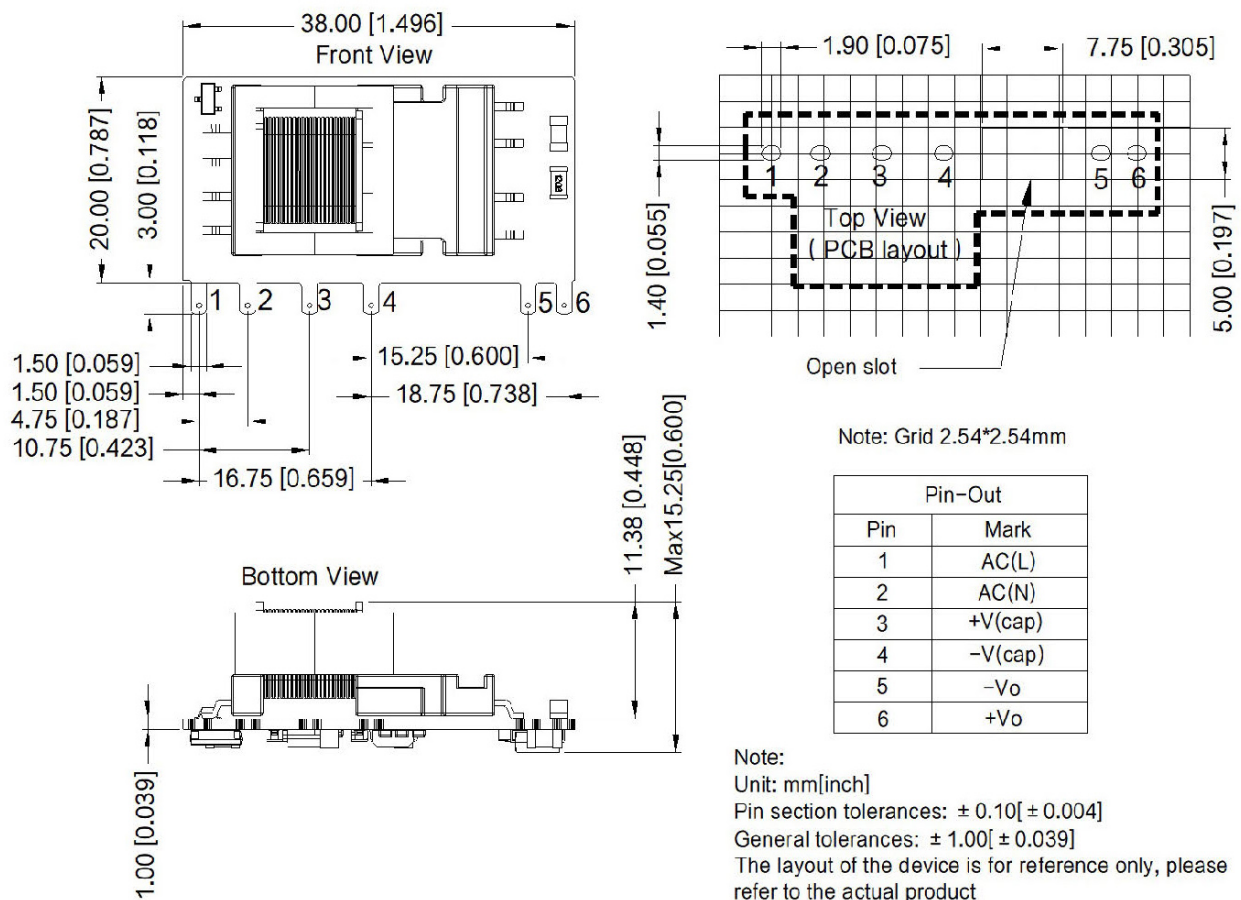

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited

Vigortronix.com