



Features:


- Minature Audio Input transformer
- Encapsulated in a box.
- Power: 20mW
- Impedance matching: 600:1500 Ohms
- Winding Ratio 1:1.58
- Peak Working Voltage 100V



Description

High quality encapsulated minature audio input transformer for the professional audio industry. Featuring a 600:1500 Ohm impedance and peak working voltage of 100V.

Dimensions and Schematic

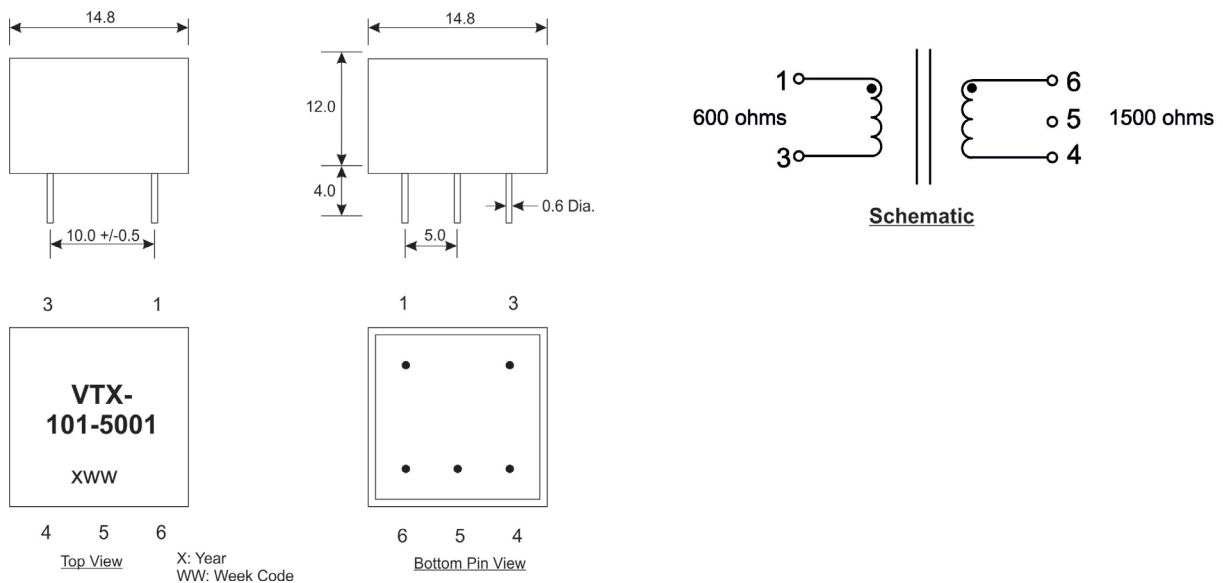

Criteria	Value	Units
Primary Impedance	600	ohms
Secondary Impedance	1500	ohms
D.C. Resistance +/-15%, PRI	43	ohms
D.C. Resistance +/-15%, SEC	78	ohms
Insertion Loss at 1 KHz,	1.5	dB
Dielectric Test PRI-SEC	1250	V AC
Turns Ratio (PRI:SEC), +/-2%	1:1.58	----
Peak working Voltage	100	V AC

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
 The information contained in this document is subject to change without notice.